
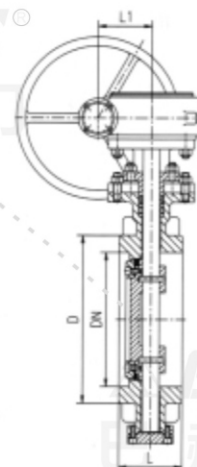


► **对夹式三偏心硬密封蝶阀 (D373/673/973H/F/W)**

Wafer type metal seated triple eccentric butterfly valve

对夹式涡轮金属密封蝶阀D373^F_H
三维偏心多层次

Wafer worm-gear metal sealed
butterfly valve D373^F_H
three-dimensional
eccentric multi-layered

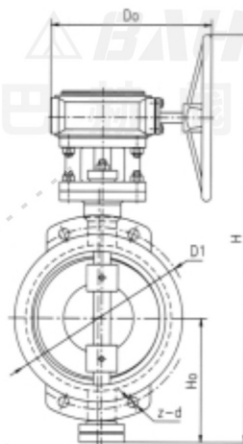

主要外形及连接尺寸 Main shape and connection size

公称压力 Nominal pressure PN(MPa)	公称通径 Nominal diameter DN (mm)	L	D	D1	Z-d	Ho	D373H			D673H			D973H		
							H	L1	D0	H	L1	D0	H	L1	D0
0.6	100	56	144	170	4-18	75	360	240	200	390	92	355	400	255	250
	125	64	174	200	8-18	90	385	260	200	420	92	355	486	255	250
	150	70	199	225	8-18	175	455	66	150	460	185	298	548	185	298
	200	71	254	280	8-18	210	471	85	170	486	402	419	600	402	419
	250	76	309	335	12-18	243	533	85	170	548	402	419	621	402	419
	300	83	363	395	12-23	300	606	106	205	621	470	437	640	470	437
	350	92	413	445	12-23	310	694	106	205	698	470	437	702	470	437
	400	102	463	495	16-23	363	757	130	240	765	490	461	775	490	461
	450	114	518	550	16-23	380	814	155	240	824	515	477	833	515	477
	500	127	568	600	20-23	412	902	168	306	910	531	393	920	531	493
	600	154	667	705	20-26	480	1048	198	324	1057	603	517	1066	603	517
	700	165	772	810	24-26	534	1277	220	335	1286	603	517	1295	603	517
	800	190	878	920	24-30	595	1385	241	356	1390	697	545	1405	697	545
	900	203	978	1020	24-30	656	1490	241	356	1500	697	617	1510	697	617
	1000	216	1078	1120	28-30	720	1620	241	356	1718	697	617	1820	697	617
	1200	254	1295	1340	32-33	780	2190	35	785	2195	685	358	2200	685	358
	1400	279	1510	1560	36-36	880	2326	35	785	2334	685	358	2340	685	358
1.0	1600	318	1710	1760	40-36	990	2685	35	785	-	-	-	2710	250	1065
	1800	356	1918	1970	44-39	1090	2924	60	865	-	-	-	2950	250	1065
	2000	406	2125	2180	48-42	1190	3186	60	865	-	-	-	3250	300	1175
	100	56	156	180	8-18	75	360	240	200	390	92	355	400	255	250
	125	64	184	210	8-18	90	385	260	200	420	92	355	486	255	250
	150	70	211	240	8-23	175	455	66	150	460	185	298	543	185	298
	200	71	266	295	8-23	210	470	85	170	486	402	419	600	402	419
	250	76	319	350	12-23	243	533	85	170	548	402	419	621	402	419
	300	83	370	400	12-23	300	606	106	205	621	470	437	640	470	437
	350	92	429	460	16-23	310	694	106	205	698	470	437	702	470	437
	400	102	480	515	16-26	363	757	130	240	765	490	461	775	490	461
	450	114	530	565	20-26	380	814	155	240	824	515	477	833	515	477
	500	127	582	610	20-26	412	902	169	306	910	531	493	920	531	493
	600	154	682	725	20-30	480	1048	198	324	1057	1380	318	1066	603	517
	700	165	794	840	24-30	534	1277	220	335	1286	1380	318	1295	603	517
	800	190	901	950	24-33	595	1385	241	356	1390	1860	355	1405	697	545
	900	203	1001	1050	28-33	656	1490	241	356	1500	1860	355	1510	697	617
	1000	216	1112	1160	28-36	720	1620	241	356	1718	1860	355	1820	697	617
	1200	254	1328	1380	32-39	780	2191	35	785	2195	685	358	2200	685	358
	1400	279	1530	1590	36-42	880	2326	35	785	2334	685	358	2340	685	358
	1600	318	1750	1820	40-48	990	2685	35	785	-	-	-	2710	250	1065
	1800	356	1950	2020	44-48	1090	2924	60	865	-	-	-	2950	250	1065
	2000	406	2150	2230	48-48	1190	3186	60	865	-	-	-	3250	300	1175

对夹式三偏心硬密封蝶阀 (D373/673/973H/F/W) ◀

Wafer type metal seated triple eccentric butterfly valve



www.bahe-valve.com

主要外形及连接尺寸 Main shape and connection size

公称压力 Nominal pressure PN(MPa)	公称通径 Nominal diameter DN (mm)	L	D	D1	Z-d	Ho	D373H			D673H			D973H		
							H	L1	DO	H	L1	DO	H	L1	DO
1.6	100	56	156	180	8-18	75	360	240	200	390	92	355	400	255	250
	125	64	184	210	8-18	90	385	260	200	420	92	355	486	255	250
	150	70	211	240	8-23	175	455	66	150	460	185	298	548	185	298
	200	71	266	295	12-23	210	471	85	170	486	402	419	600	402	419
	250	76	319	355	12-26	243	533	85	170	548	402	419	621	402	419
	300	83	370	410	12-26	300	606	106	205	621	470	437	640	470	437
	350	92	429	470	16-26	310	694	106	205	698	470	437	702	470	437
	400	102	480	525	16-30	363	757	130	240	765	490	461	775	490	461
	450	114	548	585	20-30	380	814	155	240	824	515	477	833	515	477
	500	127	609	650	20-33	412	902	169	306	910	531	393	920	531	493
	600	154	720	770	20-36	480	1048	198	324	1057	603	517	1066	603	517
	700	165	794	840	24-36	534	1277	220	335	1286	603	517	1295	603	517
	800	190	901	950	24-39	595	1385	241	356	1390	697	545	1405	697	545
	900	203	1001	1050	28-39	656	1490	241	356	1500	697	617	1510	697	617
	1000	216	1112	1170	28-42	720	1620	241	356	1718	697	617	1820	697	617
	1200	254	1328	1390	32-48	780	2191	35	785	-	-	-	2200	685	358
	1400	279	1530	1590	36-48	880	2326	35	785	-	-	-	2340	685	358
	1600	318	1750	1820	40-55	990	2685	35	785	-	-	-	2710	250	1065
	1800	356	1950	2020	44-55	1090	2924	60	865	-	-	-	2950	250	1065
	2000	406	2150	2230	48-60	1190	3186	60	865	-	-	-	3250	300	1175
2.5	100	56	156	190	8-23	75	385	240	200	420	92	355	600	255	250
	125	64	184	220	8-26	90	455	260	200	460	92	355	640	255	250
	150	70	211	250	8-26	175	445	66	150	463	206	475	481	406	475
	200	71	274	310	12-26	210	510	85	170	528	442	610	547	442	610
	250	76	330	370	12-30	243	5690	85	170	595	442	610	621	442	610
	300	83	389	430	16-30	300	653	106	205	700	558	670	750	558	670
	350	92	448	490	16-30	310	730	558	670	786	558	670	845	558	670
	400	102	503	550	16-36	363	810	491	1120	860	491	1120	912	491	1120
	450	114	548	600	20-36	380	850	687	1120	918	687	1120	1015	687	1120
	500	127	609	660	20-36	412	940	687	1120	1007	687	1120	1100	687	1120
	600	154	720	770	20-39	480	1150	710	1456	1214	710	1456	1250	710	1456
	700	165	820	875	24-42	534	1195	710	1456	1260	710	1456	1328	710	1456
	800	190	928	990	24-48	595	1268	710	1456	1365	710	1493	1452	710	1456
	900	203	1028	1090	28-48	656	1490	35	785	-	-	-	1775	697	617
	1000	216	1140	12010	28-56	720	1620	35	785	-	-	-	1905	697	617
	1200	254	1350	1420	32-56	780	2180	36	785	-	-	-	2191	685	358
	1400	279	1560	1640	36-60	880	-	-	-	-	-	-	2340	685	358
	1600	318	1780	1860	40-60	990	-	-	-	-	-	-	2710	250	1065
	1800	356	1980	2070	44-68	1090	-	-	-	-	-	-	2950	250	1065
	2000	406	2210	2300	48-68	1190	-	-	-	-	-	-	3250	300	1175

主要外形及连接尺寸 Main shape and connection size

公称压力 Nominal pressure PN(MPa)	公称通径 Nominal diameter DN (mm)	L	D	D1	Z-d	Ho	D373H			D673H			D973H			
							H	L1	DO	H	L1	DO	H	L1	DO	
4.0	100	64	156	190	8-23	75	420	280	200	481	92	355	530	255	250	
	125	70	184	220	8-26	90	460	280	200	547	92	355	604	255	250	
	150	76	211	250	8-26	175	485	206	475	621	450	143	715	406	475	
	200	89	284	320	12-30	210	510	442	610	653	450	143	796	442	610	
	250	114	345	385	12-33	243	569	442	610	675	535	178	845	442	610	
	300	114	409	450	16-33	300	653	558	670	715	535	178	937	558	670	
	350	127	465	510	16-36	310	730	558	670	870	558	670	1075	558	670	
	400	140	535	585	16-39	363	810	491	1120	920	491	1120	1175	491	1120	
	450	152	560	610	20-39	380	850	687	1120	1040	687	1120	1303	687	1120	
	500	152	615	670	20-42	412	940	687	1120	1170	687	1120	1478	687	1120	
	600	178	735	795	20-48	480	1150	710	1456	1295	710	1456	1575	710	1456	
Class 150Lb	6"	150	57	216	241.3	8-22	230	385	185	298	400	185	298	400	185	298
	8"	200	64	270	298.5	8-22	297	471	402	419	486	402	419	486	402	419
	10"	250	71	324	362	12-25	327	533	402	419	548	402	419	548	402	419
	12"	300	81	381	431.8	12-25	364	606	470	437	621	470	437	621	470	437
	14"	350	92	413	476.3	12-29	404	693	470	437	730	558	670	702	470	437
	16"	400	102	470	539.8	16-29	444	757	490	461	810	497	1120	775	490	461
	18"	450	114	533	577.9	16-32	472	814	515	477	850	687	1120	833	515	477
	20"	500	127	584	635	20-32	522	902	531	493	940	687	1120	920	531	493
	24"	600	154	693	749.3	20-35	590	1048	603	517	1066	603	517	1066	603	517
	28"	700	165	762	795.3	40-22	810	1277	603	517	1295	603	517	1295	603	517
	32"	800	190	864	900.2	48-22	844	1385	697	545	1405	697	545	1405	697	545
	36"	900	200	972	1109.6	44-26	890	1490	697	617	1510	697	617	1510	697	617
	40"	1000	216	1080	1020.6	44-29	950	1620	697	617	1820	697	617	1820	697	617
Class 300Lb	6"	150	59	216	269.9	8-22	311	473	85	150	481	206	475	481	206	475
	8"	200	73	270	330.2	12-25	345	532	105	202	547	442	610	574	442	610
	10"	250	83	324	387.4	16-29	364	598	105	202	621	442	610	621	442	610
	12"	300	92	381	450.8	16-32	395	683	124	235	653	558	670	653	558	670
	14"	350	117	413	514.4	20-32	447	785	124	235	730	558	670	730	558	670
	16"	400	133	470	571.5	20-35	485	845	152	270	810	491	1120	810	491	1120
	18"	450	149	533.5	628.6	24-35	514	878	178	270	850	687	1120	850	687	1120
	20"	500	159	584	685.8	24-35	587	978	184	336	940	687	1120	940	687	1120
	24"	600	181	692	812.8	24-41	654	1184	221	385	1150	710	1456	1150	710	1456
	28"	700	209	787.5	857.3	36-35	689	1328	710	1456	-	-	-	1328	710	1456
	30"	750	241	844.5	920.8	36-38	794	1380	710	1456	-	-	-	1230	710	1456
	32"	800	241	902	977.9	32-42	848	1452	710	1456	-	-	-	1452	710	1456
	36"	900	260	1010	1089	32-48	912	1775	35	785	-	-	-	1490	697	617
	40"	1000	300	1115	1190.8	40-45	1094	1905	35	785	-	-	-	1620	697	617